





BHUSHAN

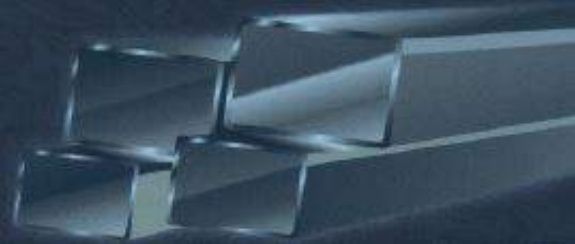

**... enhancing
the world of steel**

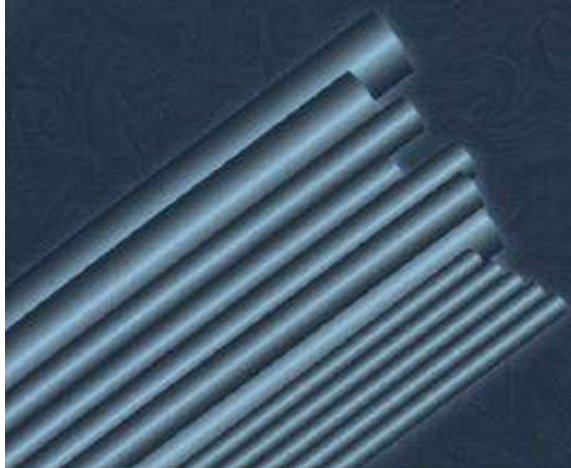

COLD ROLLED STEEL COILS/SHEETS

Thickness (mm)	0.10 to 4.00
Width (mm)	10 to 1700 (Max)
Cut - to - Length (mm)	Up to 4500mm with tolerance of +2/-0 mm (Further close tolerance on request)
Coil Weight (MT)	Up to 30 MT (7 to 18 kg/mm width)
Surface Finish	Super Bright, Bright, Dull & Matte. (R_s Value with controlled R_{max} on request).
Grades	<p>Specifications - As per JIS/BIS/ASTM/EN Standards</p> <p>Low Carbon CRCA Grades Super EDD/EDD/DD/D (SPCX, SPCEN, SPCD, SPCC) <i>non-aging</i>, IF-High Strength steel (IF-HSS), High Strength Low Alloy Steel (HSLA), viz., ST -42, ST-45, ST-52, SAPH-400/410, Steel for Porcelain Enameling, Corrosion Resistant Steel, viz., Tin Mill Black Plate (TMBP)</p> <p>Medium & High Carbon CRCA Grades C - 30, C - 40, MC - 11, EN - 8, for spring steel application, C - 55, MC - 12, EN - 9 C - 62, C - 60, C - 80, HC - 14, EN - 42 J</p> <p>ELECTRICAL Grades Elec - I, Elec - II, Elec - III, Semi Processed Elect. Steel</p> <p>OTHER CRCA Grades Case Hardening Steel - 15 Cr3, SAE 1010, SAE 1012 Through Hardening Grades - SAE 1040, SAE 1045, 1055, 1065, 1080, 1541</p>

H.R. PICKLED / SKIN PASSED & OILED

Thickness	Up to 3.00 mm	3.00 mm - 4.00 mm	Above 4.00 mm
Max. Width for Cut Size	1500 mm	1250 mm	600 mm
Width for Coil	50 mm - 1700 mm	50 mm - 1700 mm	50 mm - 1700 mm



BHUSHAN

BHUSHAN STEEL LIMITED